

KStrong® 6 ft. Internal design shock absorbing lanyard with snap hook and rebar hook (ANSI)

Model: UFL204111

KStrong® 6 ft. Internal design shock absorbing lanyard with one (1) snap hook and one (1) rebar hook (ANSI)

DESIGN

- 1.57 in. (40mm) wide polyester tubular elasticated webbing incorporated with energy absorbing (6 ft.) POY webbing.
- One end of the lanyard equipped with steel stamped snap hook (PN-146) and the other end of the lanyard equipped with a steel snap hook (PN-167).

WEBBING

Material: Polyester
Width: 1.57 in. \pm 0.04 in. (40mm \pm 1mm)
Breaking Strength: 5000 lbs. (2268kg)

STITCHING THREAD

Material: High-tenacity polyester

METAL COMPONENT



Material: Alloy steel
Plating: Zinc plated
Finish: Shot blasted
Breaking Strength: 5000 lbs. (2268kg)

WEIGHT

3.37 lbs. \pm 0.02 lbs. (1530 gm \pm 10 gm)

RELEVANT STANDARDS

Meets or Exceeds ANSI Z359.13-2013

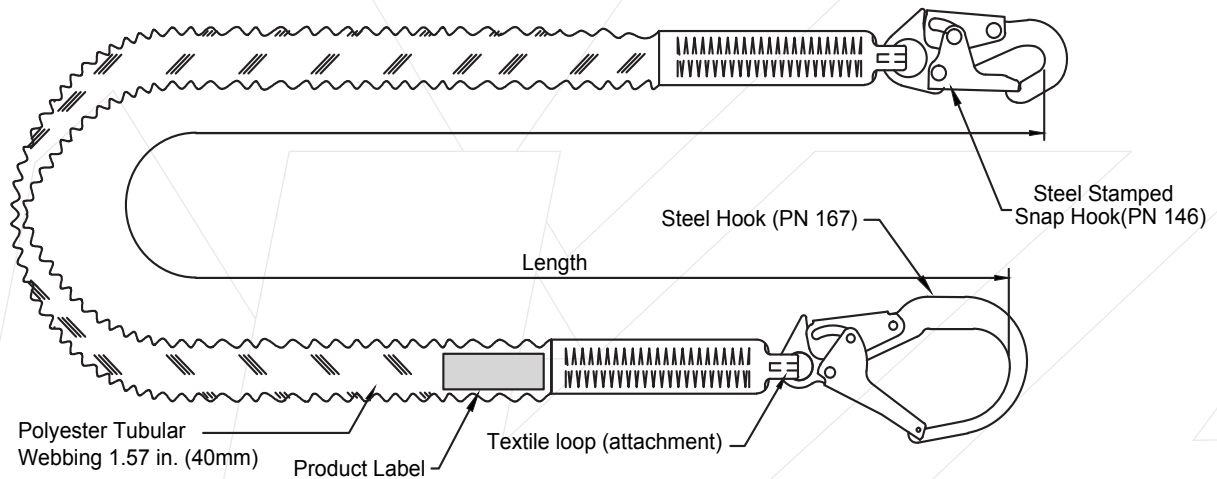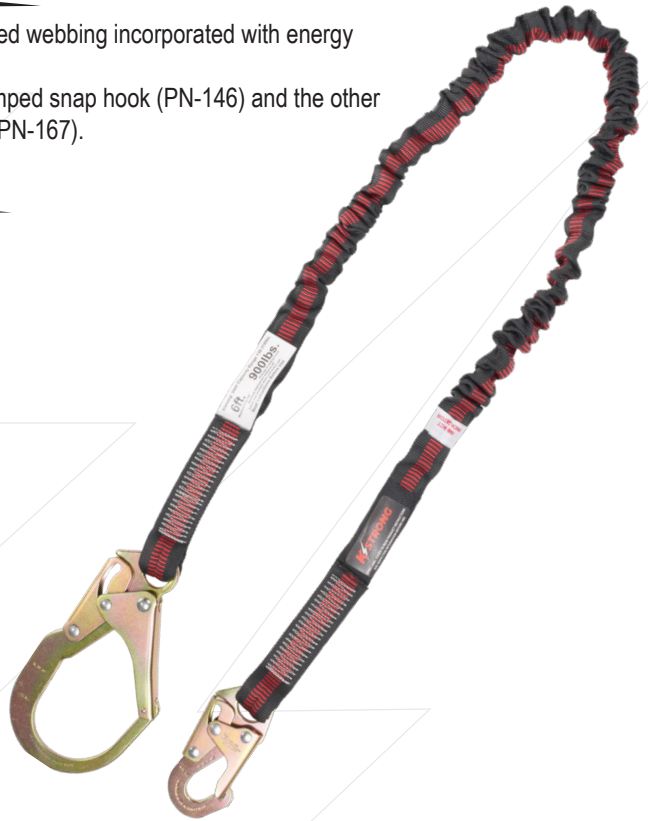

Stitching Pattern

Meets or Exceeds ANSI Z359.13-2013

LENGTH: 6 ft.